

LEC XO[®]

LX-Series
MADE IN VIETNAM

LX250-12(12V250AH)

RECHARGEABLE SEALED LEAD-ACID BATTERY



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING



MEDICAL



FIRE &
SECURITY

APPLICATIONS

- All purpose
- Uninterruptible Power Supply (UPS)
 - Electric Power System (EPS)
- Emergency backup power supply
 - Alarm and security system
- Communication power supply
 - DC power supply
 - Auto control system

GENERAL FEATURES

- 10 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate


STANDARDS

- Compliance with IEC60896 standards, EU Battery Directive
- Manufactured with IATF16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities

SPECIFICATIONS

Rated Voltage		12V
Nominal Capacity	250.0Ah	(C ₂₀ ,1.80V/cell)
Dimension	Length	178±1mm (7.00 inches)
	Width	35±1mm (1.38 inches)
	Container Height	60±1mm (2.36 inches)
	Total Height	66±1mm (2.60 inches)
Approx Weight		70.6 Kg (155.7 lbs)
Terminal		M8
Container Material		ABS
Rated Capacity(25°C)	262.0 Ah	(20hr,13.1A,1.80V/cell)
	250.0 Ah	(10hr,25.0A,1.80V/cell)
	227.5 Ah	(5hr,45.5A,1.75V/cell)
	207.3 Ah	(3hr,69.1A,1.75V/cell)
	159.4 Ah	(1hr,159.4A,1.60V/cell)
Max. Discharge Current		2500A (5s)
Internal Resistance(25°C)		Approx 2.5mΩ
Operating Temp. Range	Discharge	-15 ~50°C (5 ~122°F)
	Charge	-20 ~40°C (-4 ~104°F)
	Storage	-15 ~40°C (5 ~104°F)
National Operating Temp Range		25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 75.0A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
Standby Use	Initial Charging Current less than 75.0A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge		LX series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.

DIMENSIONS

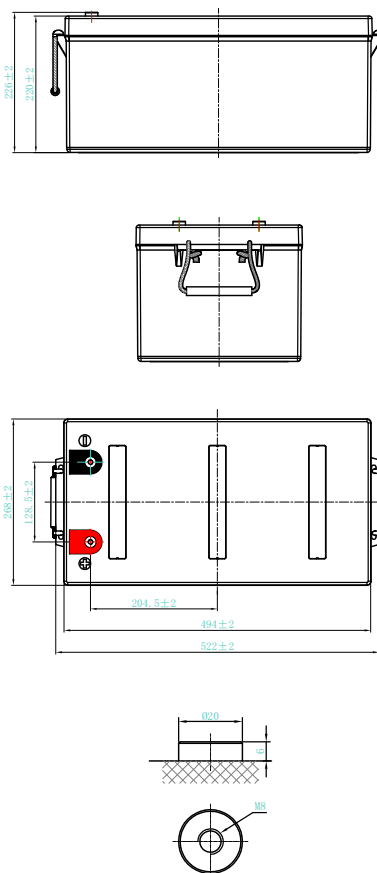

LECXO®

LX-Series
MADE IN VIETNAM

LX250-12(12V250AH)

RECHARGEABLE SEALED LEAD-ACID BATTERY



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING




MEDICAL




FIRE &
SECURITY


DISCHARGE CHARACTERISTICS

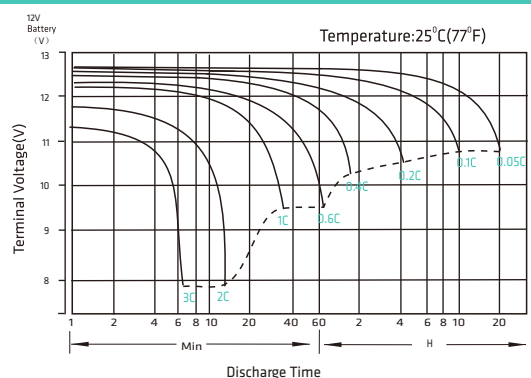


FLOAT CHARGING CHARACTERISTICS

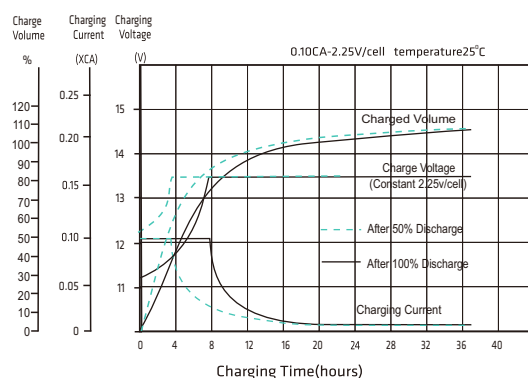

TEMPERATURE EFFECTS IN RELATION TO BATTERY CAPACITY

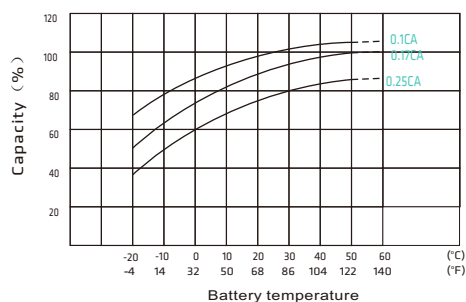

FLOAT SERVICE LIFE

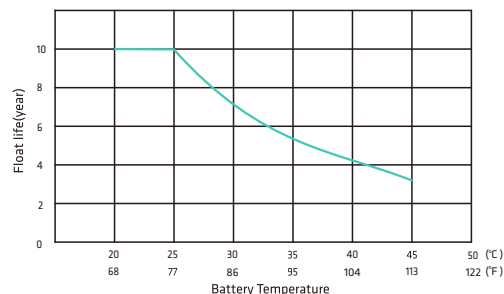

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	362.5	320.7	252.2	225.5	164.9	139.7	101.2	85.1	62.4	49.0	42.5	37.5	28.8	23.9	12.7
1.80V/cell	411.4	363.4	285.1	245.5	174.7	144.7	104.7	87.9	67.8	52.3	44.7	40.3	30.3	25.0	13.1
1.75V/cell	446.2	393.4	307.8	250.5	181.0	151.8	110.0	92.5	69.1	53.3	45.5	40.6	30.5	25.3	13.3
1.70V/cell	475.7	417.8	326.4	255.5	184.6	154.8	112.2	94.4	70.4	54.2	46.3	40.8	30.9	25.5	13.4
1.67V/cell	490.8	430.0	335.3	259.3	187.3	157.1	113.9	95.7	71.1	55.0	47.2	41.0	31.4	25.8	13.6
1.60V/cell	507.6	443.4	343.9	263.0	190.1	159.4	115.5	97.1	71.7	55.7	47.9	41.3	31.8	26.1	13.7

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	641.2	582.9	460.5	413.7	304.4	259.3	188.4	158.9	117.1	92.3	80.4	71.1	54.9	45.6	24.2
1.80V/cell	717.3	652.0	515.0	446.8	320.3	267.2	193.9	163.3	126.5	98.1	84.2	76.0	57.6	47.6	25.1
1.75V/cell	765.6	695.9	549.7	452.4	329.9	279.1	202.9	171.2	128.6	99.6	85.3	76.4	57.7	48.1	25.2
1.70V/cell	804.8	731.5	577.9	457.6	334.2	283.1	206.0	174.0	130.7	101.0	86.5	76.7	58.6	48.5	25.5
1.67V/cell	817.9	743.4	587.3	460.9	337.2	285.7	208.0	175.7	131.3	102.1	88.0	76.8	59.2	49.1	25.8
1.60V/cell	829.4	753.9	595.6	462.8	338.9	287.8	209.7	177.1	131.8	102.9	88.9	77.1	59.9	49.5	26.0