

ACCESS CONTROLLER POWER

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply




LED Products



CCTV

**12V5AUPS Uninterruptible
Power Supply Box**

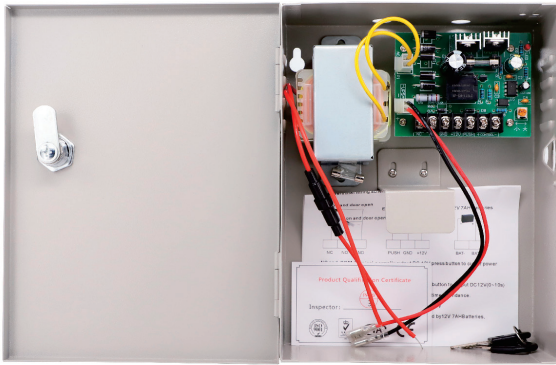

PRODUCT NAME	12V5AUPS Uninterruptible Power Supply Box
AC Input	180-240V AC 50/60Hz
Persistent Current	3.5A
Operation Temperature	20°C ~ +60°C
Door Opening Delay	0` 15 Seconds Adjustable
Dimension	215*167*70MM
Product Weight	1.1KG

CAMERA POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply




LED Products



CCTV

12V5A 4CH Power Box

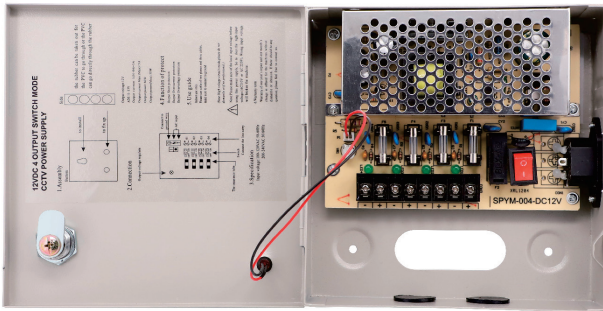

PRODUCT NAME

12V5A 4CH Power Box

AC Input

AC110-220V $\pm 15\%$

Persistent Current

5A

Overload Short Circuit

Fuse Blown

Cooling Method

Natural Cooling


Dimension

163*163*55MM

Product Weight

0.84KG

12V10A 9CH Power Box

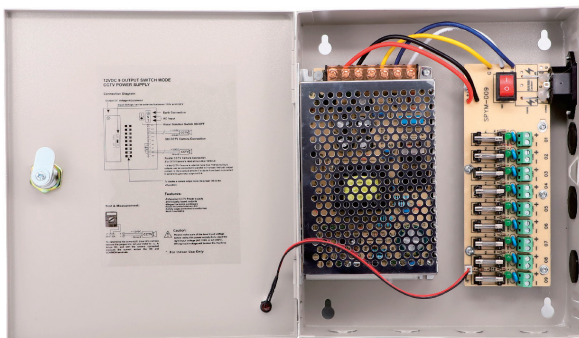

PRODUCT NAME

12V10A 9CH Power Box

AC Input

AC110-220V $\pm 15\%$

Persistent Current

10A

Overload Short Circuit

Fuse Blown

Cooling Method

Natural Cooling

Dimension

205*235*55MM

Product Weight

1.46KG

CAMERA POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply




LED Products



CCTV

12V15A 18CH Power Box

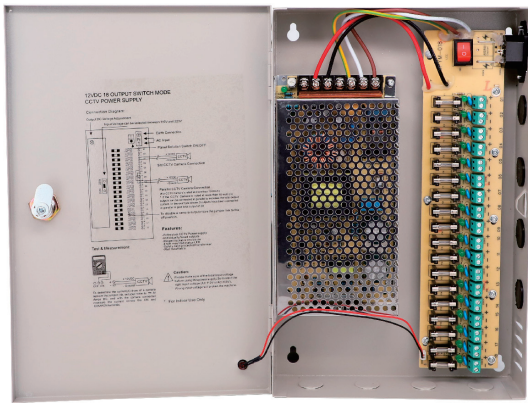

PRODUCT NAME

12V15A 18CH Power Box

AC Input

AC110-220V $\pm 15\%$

Persistent Current

15A

Operation Temperature

Fuse Blown

Cooling Method

Natural Cooling


Dimension

317*210*53MM

Product Weight

1.87KG

12V20A 18CH Power Box

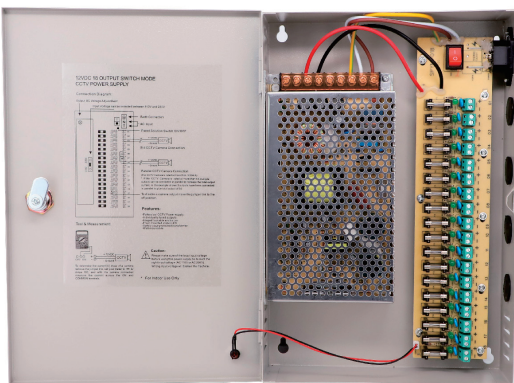

PRODUCT NAME

12V20A 18CH Power Box

AC Input

AC110-220V $\pm 15\%$

Persistent Current

10A

Overload Short Circuit

Fuse Blown

Cooling Method

Natural Cooling

Dimension

317*220*63MM

Product Weight

2.09KG

CAMERA POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply



LED Products



CCTV

12V30A 18CH Power Box



PRODUCT NAME

12V30A 18CH Power Box

AC Input

AC110-220V $\pm 15\%$

Persistent Current

30A

Overload Short Circuit

Fuse Blown

Cooling Method

Natural Cooling

Dimension

317*220*63MM

Product Weight

2.29KG

CCTV PLASTIC POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply



LED Products



CCTV

PS4C48W



PRODUCT NAME

PS4C48W

Power

48W

Input Voltage

150-285V AC

Output Voltage

DC 12/13.5V/15V (Select by switch)

Plug

BS Plug


Dimension

144mmx80mmx33mm
(LxWxH)

Product Weight

0.2kg/pc

PS8C60W

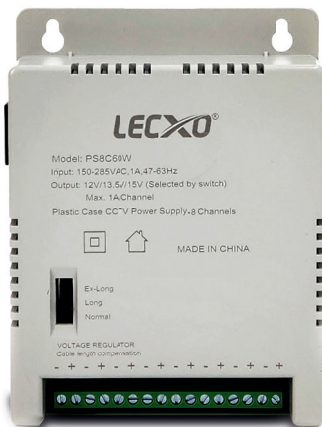

PRODUCT NAME

PS8C60W

Power

60W

Input Voltage

150-285V AC

Output Voltage

DC 12/13.5V/15V (Select by switch)

Plug

BS Plug

Dimension

144mm x 109.5mm x 33mm
(L x W x H)

Product Weight

0.27kg/pc

CCTV PLASTIC POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply



LED Products



CCTV

PS16C96W



PRODUCT NAME

PS16C96W

Power

96W

Input Voltage

150-285V AC

Output Voltage

DC 12/13.5V/15V (Select by switch)

Plug

BS Plug

Dimension

186mm x 130.5mm x 39mm
(L x W x H)

Product Weight

0.43kg/pc

METAL POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply



LED Products



CCTV

5V5A



PRODUCT NAME

5V5A

AC Input

100-220V AC 50/60Hz

Persistent Current

5A

Operation Temperature

-10°C~45°C

Product Power

25W

Dimension

110*78*36MM

Product Weight

0.197KG

5V10A



PRODUCT NAME

5V10A

AC Input

100-220V AC 50/60Hz

Persistent Current

10A

Operation Temperature

-10°C~45°C

Door Opening Delay

50W

Dimension

158*97*42MM

Product Weight

0.314KG

METAL POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply



LED Products



CCTV

5V20A



PRODUCT NAME

5V20A

AC Input

100-220V AC 50/60Hz

Persistent Current

20A

Operation Temperature

-10°C~45°C

Product Power

100W

Dimension

199*97*42MM

Product Weight

0.46KG

5V30A



PRODUCT NAME

5V30A

AC Input

100-220V AC 50/60Hz

Persistent Current

30A

Operation Temperature

-10°C~45°C

Product Power

150W

Dimension

199*97*42MM

Product Weight

0.526KG

METAL POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply



LED Products



CCTV

5V40A



PRODUCT NAME

5V40A

AC Input

100-220V AC 50/60Hz

Persistent Current

40A

Operation Temperature

-10°C~45°C

Product Power

200W

Dimension

199*109*52MM

Product Weight

0.684KG

12V3A



PRODUCT NAME

12V3A

AC Input

100-220V AC 50/60Hz

Persistent Current

3A

Operation Temperature

-10°C~45°C

Product Power

36W

Dimension

110*78*36MM

Product Weight

0.197KG

METAL POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply



LED Products



CCTV

12V5A



PRODUCT NAME

12V5A

AC Input

100-220V AC 50/60Hz

Persistent Current

5A

Operation Temperature

-10°C~45°C

Product Power

60W

Dimension

158*97*42MM

Product Weight

0.305KG

12V10A



PRODUCT NAME

12V10A

AC Input

100-220V AC 50/60Hz

Persistent Current

10A

Operation Temperature

-10°C~45°C

Product Power

120W

Dimension

199*97*42MM

Product Weight

0.46KG

METAL POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply



LED Products



CCTV

12V15A



PRODUCT NAME

12V15A

AC Input

100-220V AC 50/60Hz

Persistent Current

15A

Operation Temperature

-10°C~45°C

Product Power

180W

Dimension

199*97*42MM

Product Weight

0.496KG

12V20A



PRODUCT NAME

12V20A

AC Input

100-220V AC 50/60Hz

Persistent Current

15A

Operation Temperature

-10°C~45°C

Product Power

240W

Dimension

199*109*50MM

Product Weight

0.626KG

METAL POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply



LED Products



CCTV

12V30A



PRODUCT NAME

12V30A

AC Input

100-220V AC 50/60Hz

Persistent Current

30A

Operation Temperature

-10°C~45°C

Product Power

360W

Dimension

215*112*50MM

Product Weight

0.8KG

12V40A



PRODUCT NAME

12V40A

AC Input

100-220V AC 50/60Hz

Persistent Current

40A

Operation Temperature

-10°C~45°C

Door Opening Delay

480W

Dimension

240*125*65MM

Product Weight

1.3KG

METAL POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply



LED Products



CCTV

12V50A



PRODUCT NAME

12V50A

AC Input

100-220V AC 50/60Hz

Persistent Current

50A

Operation Temperature

-10°C~45°C

Product Power

600W

Dimension

242*131*68MM

Product Weight

1.64KG

24V2A



PRODUCT NAME

24V2A

AC Input

100-220V AC 50/60Hz

Persistent Current

2A

Operation Temperature

-10°C~45°C

Door Opening Delay

48W

Dimension

110*78*36MM

Product Weight

0.196KG

METAL POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply



LED Products



CCTV

24V3A



PRODUCT NAME

24V3A

AC Input

100-220V AC 50/60Hz

Persistent Current

3A

Operation Temperature

-10°C~45°C

Product Power

72W

Dimension

158*97*42MM

Product Weight

0.306KG

24V5A



PRODUCT NAME

24V5A

AC Input

100-220V AC 50/60Hz

Persistent Current

5A

Operation Temperature

-10°C~45°C

Product Power

120W

Dimension

199*97*42MM

Product Weight

0.458KG

METAL POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply



LED Products



CCTV

24V10A



PRODUCT NAME

24V10A

AC Input

100-220V AC 50/60Hz

Persistent Current

10A

Operation Temperature

-10°C~45°C

Product Power

240W

Dimension

199*109*50MM

Product Weight

0.634KG

24V15A



PRODUCT NAME

24V15A

AC Input

100-220V AC 50/60Hz

Persistent Current

15A

Operation Temperature

-10°C~45°C

Product Power

360W

Dimension

215*112*50MM

Product Weight

0.786KG

METAL POWER SUPPLY

TECHNICAL PARAMETERS

Common Features



High Quality



Stable Supply



LED Products



CCTV

24V20A



PRODUCT NAME

24V20A

AC Input

100-220V AC 50/60Hz

Persistent Current

20A

Operation Temperature

-10°C~45°C

Product Power

480W

Dimension

240*125*65MM

Product Weight

1.3KG

24V30A



RPRODUCT NAME

24V30A

AC Input

100-220V AC 50/60Hz

Persistent Current

30A

Operation Temperature

-10°C~45°C

Product Power

720W

Dimension

242*131*68MM

Product Weight

1.66KG