

LECXO®

LX1.2-12 (12V-1.2AH)

RECHARGEABLE SEALED LEAD-ACID BATTERY



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING



MEDICAL



FIRE &
SECURITY



LX-SERIES

APPLICATIONS

- All purpose
- Uninterruptible Power Supply (UPS)
 - Electric Power System (EPS)
- Emergency backup power supply
 - Alarm and security system
- Communication power supply
 - DC power supply
- Auto control system

GENERAL FEATURES

- 7 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate

STANDARDS




Compliance with & Manufacturing Facilities Certified by:

- ISO 45001, 9001 & 14001
- IEC 60896 Standard
- EU Battery Directive
 - UL Certified
 - CE Certified

SPECIFICATIONS

Rated Voltage		12V
Nominal Capacity	1.2.Ah	(C ₂₀ : 1.75 V/Cell)
Dimension	Length	97±1mm (3.82 inches)
	Width	43±1mm (1.69 inches)
	Container Height	52±1mm (2.04 inches)
	Total Height	58±1mm (2.28 inches)
Approx Weight		0.57 Kg (1.26 lbs)
Terminal		T1
Container Material		ABS
Rated Capacity (25°C)	1.20Ah	(20hr,0.060A,1.75V/cell)
	1.13 Ah	(10hr,0.113A,1.75V/cell)
	1.04Ah	(5hr,0.207A,1.75V/cell)
	0.92 Ah	(3hr,0.306A,1.75V/cell)
	0.79 Ah	(1hr,0.789A,1.60V/cell)
Max. Discharge Current		18A (5s)
Internal Resistance (25°C)		Approx 110mΩ
Operating Temp. Range	Discharge	-15~50°C (5~122°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)
National Operating Temp Range		25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 0.36A. Voltage 14.4V~15.0V at 25° C (77° F)Temp. Coefficient -30mV/°C	
	Standby Use	
Standby Use	Initial Charging Current less than 0.36A. Voltage 13.5V~13.8V at 25° C (77° F)Temp. Coefficient -20mV/°C	
	Effect of Temp to Capacity	
Effect of Temp to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge		L X series batteries may be stored for up to 6 months at 25° C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.

DIMENSIONS

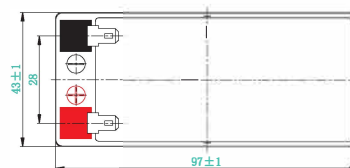

T1

LECXO®

LX1.2-12 (12V-1.2AH)

RECHARGEABLE SEALED LEAD-ACID BATTERY



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING



MEDICAL




FIRE &
SECURITY




LX-SERIES


DISCHARGE CHARACTERISTICS

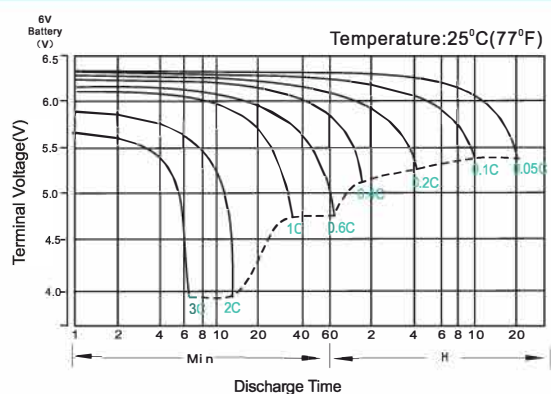


FLOAT CHARGING CHARACTERISTICS

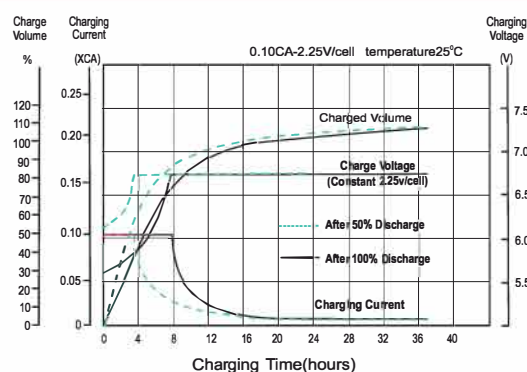

FLOAT SERVICE LIFE

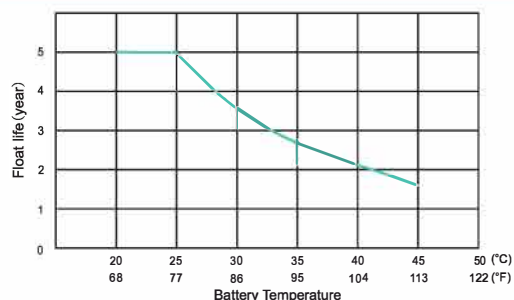

TEMPERATURE EFFECTS IN RELATION TO BATTERY CAPACITY

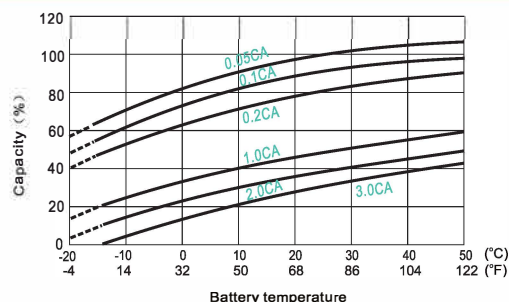

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	3.73	2.28	1.78	1.48	1.10	0.813	0.714	0.523	0.411	0.296	0.236	0.201	0.172	0.136	0.111	0.059
1.80V/cell	4.01	2.42	1.86	1.54	1.14	0.835	0.731	0.534	0.418	0.301	0.240	0.204	0.175	0.138	0.112	0.059
1.75V/cell	4.23	2.52	1.92	1.59	1.17	0.853	0.746	0.543	0.426	0.306	0.243	0.207	0.177	0.139	0.113	0.060
1.70V/cell	4.43	2.62	1.99	1.63	1.20	0.872	0.760	0.553	0.432	0.311	0.246	0.209	0.179	0.141	0.115	0.060
1.67V/cell	4.58	2.69	2.04	1.67	1.22	0.886	0.771	0.560	0.437	0.314	0.249	0.211	0.181	0.142	0.115	0.061
1.60V/cell	4.86	2.80	2.11	1.72	1.25	0.908	0.789	0.572	0.446	0.319	0.253	0.215	0.183	0.144	0.117	0.062

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	7.06	4.34	3.40	2.86	2.13	1.58	1.39	1.02	0.804	0.583	0.465	0.397	0.341	0.269	0.220	0.117
1.80V/cell	7.52	4.57	3.55	2.96	2.19	1.61	1.42	1.04	0.817	0.591	0.471	0.402	0.345	0.273	0.223	0.119
1.75V/cell	7.84	4.72	3.64	3.02	2.23	1.64	1.44	1.05	0.830	0.599	0.477	0.407	0.349	0.275	0.225	0.120
1.70V/cell	8.13	4.87	3.74	3.09	2.28	1.67	1.46	1.07	0.840	0.607	0.483	0.412	0.353	0.278	0.227	0.121
1.67V/cell	8.34	4.98	3.82	3.15	2.32	1.70	1.48	1.08	0.848	0.612	0.487	0.415	0.356	0.280	0.229	0.122
1.60V/cell	8.68	5.13	3.92	3.23	2.37	1.73	1.51	1.10	0.862	0.621	0.494	0.420	0.360	0.284	0.232	0.123