

LECXO®

LX10-12(12V10AH)

RECHARGEABLE SEALED LEAD-ACID BATTERY



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING



MEDICAL



FIRE &
SECURITY



LX-Series
MADE IN VIETNAM

APPLICATIONS

- All purpose
- Uninterruptible Power Supply (UPS)
 - Electric Power System (EPS)
- Emergency backup power supply
 - Alarm and security system
- Communication power supply
 - DC power supply
 - Auto control system

GENERAL FEATURES

- 7 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate





STANDARDS

- Compliance with IEC60896 standards, EU Battery Directive
- Manufactured with IATF16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities

SPECIFICATIONS

Rated Voltage		12V
Nominal Capacity	10Ah	(C ₂₀ ,1.75V/cell)
Dimension	Length	151±2mm (5.94 inches)
	Width	65±1mm (2.56 inches)
	Container Height	111±2mm (4.37 inches)
	Total Height	117±2mm (4.61 inches)
Approx Weight		3.07 Kg (6.77 lbs)
Terminal		T1/T2
Container Material		ABS
Rated Capacity(25°C)	10.0 Ah	(20hr,0.500A,1.75V/cell)
	9.46 Ah	(10hr,0.946A,1.75V/cell)
	8.60 Ah	(5hr,1.72A,1.75V/cell)
	7.65Ah	(3hr,2.55A,1.75V/cell)
	6.80 Ah	(1hr,6.80A,1.60V/cell)
Max. Discharge Current		150A (5s)
Internal Resistance(25°C)		Approx20mΩ
Operating Temp. Range	Discharge	-15 ~50° C (5 ~122° F)
	Charge	-20 ~40° C (-4 ~104° F)
	Storage	-15 ~40° C (5 ~104° F)
National Operating Temp Range		25±3° C (77±5° F)
Cycle Use	Initial Charging Current less than 3.0A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
Standby Use	Initial Charging Current less than 3.0A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Effect of temp. to Capacity	40° C (104° F)	103%
	25° C (77° F)	100%
	0° C (32° F)	86%
Self Discharge		LX series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.

DIMENSIONS



T1

LEC XO®

LX10-12(12V10AH)

RECHARGEABLE SEALED LEAD-ACID BATTERY



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING



MEDICAL




FIRE &
SECURITY




LX-Series
MADE IN VIETNAM




DISCHARGE CHARACTERISTICS

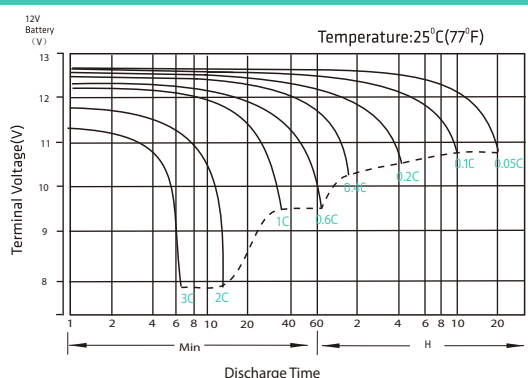


FLOAT CHARGING CHARACTERISTICS

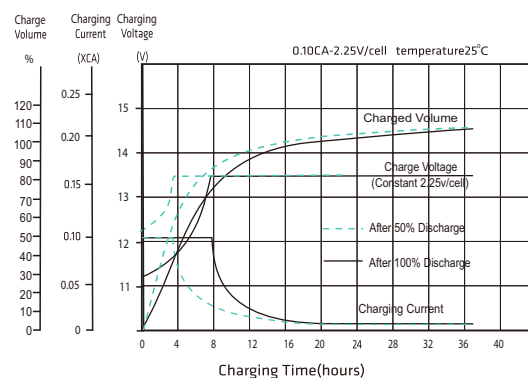

TEMPERATURE EFFECTS IN RELATION TO BATTERY CAPACITY

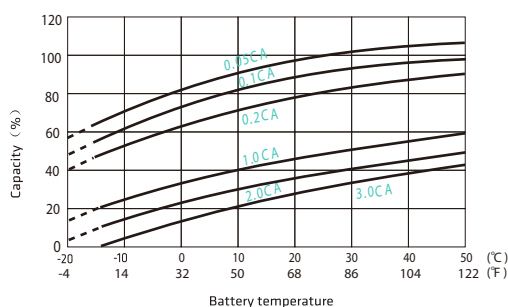

FLOAT SERVICE LIFE

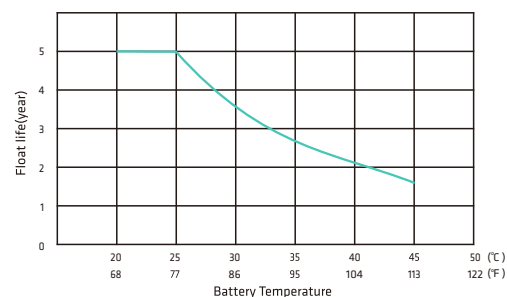

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	34.2	22.8	17.8	14.3	10.4	7.60	6.10	4.40	3.46	2.47	1.97	1.68	1.43	1.13	0.924	0.489
1.80V/cell	36.8	24.2	18.6	14.9	10.8	7.80	6.30	4.50	3.52	2.51	2.00	1.70	1.46	1.15	0.937	0.495
1.75V/cell	38.8	25.2	19.2	15.3	11.0	7.90	6.40	4.60	3.59	2.55	2.02	1.72	1.47	1.16	0.946	0.500
1.70V/cell	40.6	26.2	19.9	15.7	11.3	8.10	6.50	4.70	3.64	2.59	2.05	1.74	1.49	1.17	0.955	0.504
1.67V/cell	42.0	26.9	20.4	16.1	11.5	8.20	6.60	4.80	3.68	2.61	2.07	1.76	1.50	1.18	0.962	0.508
1.60V/cell	44.6	28.0	21.1	16.5	11.8	8.40	6.80	4.90	3.75	2.66	2.11	1.79	1.53	1.20	0.975	0.514

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	64.7	43.4	34.0	27.6	20.2	14.6	11.9	8.70	6.77	4.86	3.88	3.31	2.84	2.24	1.84	0.978
1.80V/cell	68.9	45.7	35.5	28.5	20.7	15.0	12.2	8.80	6.88	4.93	3.93	3.35	2.88	2.27	1.86	0.989
1.75V/cell	71.8	47.2	36.4	29.1	21.1	15.3	12.4	9.00	6.98	4.99	3.98	3.39	2.91	2.29	1.88	1.00
1.70V/cell	74.5	48.7	37.4	29.8	21.6	15.5	12.6	9.10	7.07	5.06	4.02	3.43	2.94	2.32	1.90	1.01
1.67V/cell	76.4	49.8	38.2	30.4	21.9	15.7	12.7	9.20	7.13	5.10	4.06	3.46	2.96	2.33	1.91	1.02
1.60V/cell	79.5	51.3	39.2	31.1	22.4	16.0	13.0	9.40	7.25	5.18	4.12	3.50	3.00	2.36	1.93	1.03