

LEC XO®

LX12-12(12V12Ah)

RECHARGEABLE SEALED LEAD-ACID BATTERY



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING



MEDICAL



FIRE &
SECURITY



LX-Series
MADE IN VIETNAM

APPLICATIONS

- All purpose
- Uninterruptible Power Supply (UPS)
 - Electric Power System (EPS)
- Emergency backup power supply
 - Alarm and security system
- Communication power supply
 - DC power supply
 - Auto control system

GENERAL FEATURES

- 7 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
 - PbCaSn alloy for plate grids: less gassing, less self- discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate

STANDARDS




Compliance with & Manufacturing Facilities Certified by:

- ISO 45001, 9001 & 14001
- IEC 60896 Standard
- EU Battery Directive
 - UL Certified
 - CE Certified

SPECIFICATIONS

Rated Voltage	12.0V	
Nominal Capacity	12.0Ah	(C ₂₀ 1.75 V/Cell)
Dimension	Length	151±2mm (5.95inches)
	Width	98±1mm (3.86 inches)
	Container Height	95±1mm (3.74 inches)
	Total Height	101±2mm (3.98 inches)
Approx Weight	3.75 Kg (7.14 lbs)	
Terminal	T1/T2	
Container Material	ABS	
Rated Capacity (25°C)	12.0Ah	(20hr,0.600A, 1.75V/cell)
	11.2Ah	(10hr,1.12A,1.75 V/cell)
	10.2Ah	(5hr,2.04A,1.75 V/cell)
	9.00Ah	(3hr,3.00A, 1.75 V/cell)
	7.20Ah	(1hr, 7.20A, 1.60 V/cell)
Max. Discharge Current	180A (5s)	
Internal Resistance (25°C)	Approx19m	
Operating Temp. Range	Discharge	-15 ~50°C (5 ~122°F)
	Charge	0 ~40°C (32 ~104°F)
	Storage	-15 ~40°C (5 ~104°F)
National Operating Temp Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 3.6A Voltage	
	14.4V ~15.0V at 25°C (77°F) Temp . Coefficient - 30mV/°C	
Standby Use	Initial Charging Current less than 3.6A Voltage	
	13.5V ~13.8V at 25°C (77°F) Temp Coefficient - 20m V/°C	
Effect of Temp to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LX Series Batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperature the time interval will be shorter	

DIMENSIONS



T1

LECxo®

LX12-12(12V12Ah)

RECHARGEABLE SEALED LEAD-ACID BATTERY



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING



MEDICAL




FIRE &
SECURITY




Lx-Series
MADE IN VIETNAM


DISCHARGE CHARACTERISTICS

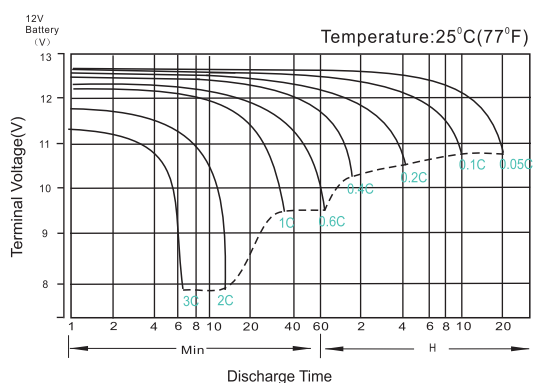


FLOAT CHARGING CHARACTERISTICS

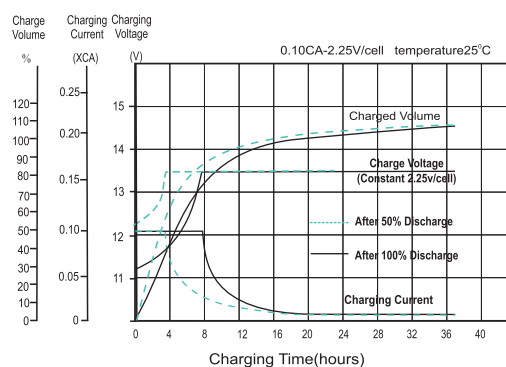

FLOAT SERVICE LIFE

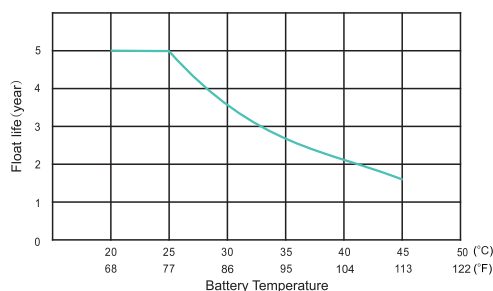

TEMPERATURE EFFECTS IN RELATION TO BATTERY CAPACITY

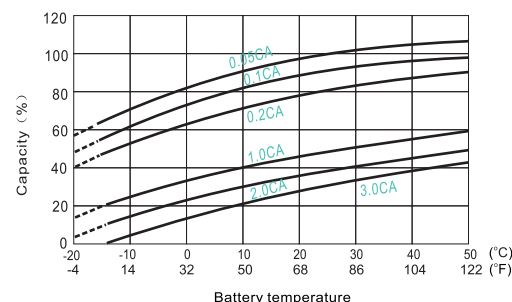

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	30.6	22.7	18.1	14.8	11.0	8.07	6.59	4.81	3.82	2.91	2.34	1.99	1.70	1.34	1.09	0.587
1.80V/cell	33.2	23.9	18.8	15.2	11.3	8.23	6.72	4.90	3.88	2.95	2.37	2.01	1.72	1.35	1.10	0.594
1.75V/cell	35.9	25.1	19.5	15.7	11.5	8.39	6.84	4.98	3.94	3.00	2.40	2.04	1.74	1.37	1.12	0.600
1.70V/cell	38.6	26.2	20.2	16.2	11.8	8.55	6.96	5.06	4.01	3.04	2.43	2.07	1.77	1.39	1.13	0.606
1.67V/cell	40.2	26.9	20.6	16.4	12.0	8.65	7.03	5.11	4.04	3.07	2.45	2.08	1.78	1.40	1.14	0.609
1.60V/cell	43.7	28.6	21.6	17.1	12.3	8.88	7.20	5.22	4.12	3.13	2.50	2.12	1.81	1.42	1.16	0.618

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	58.2	43.5	34.8	28.4	21.2	15.7	12.8	9.40	7.49	5.72	4.60	3.92	3.36	2.65	2.17	1.17
1.80V/cell	62.7	45.4	36.0	29.2	21.7	15.9	13.0	9.53	7.58	5.79	4.66	3.97	3.40	2.68	2.19	1.19
1.75V/cell	67.3	47.4	37.1	29.9	22.1	16.2	13.2	9.66	7.68	5.87	4.72	4.02	3.44	2.71	2.22	1.20
1.70V/cell	71.8	49.3	38.2	30.7	22.5	16.4	13.4	9.79	7.78	5.94	4.77	4.06	3.48	2.74	2.24	1.21
1.67V/cell	74.6	50.5	38.9	31.1	22.8	16.6	13.5	9.87	7.84	5.98	4.80	4.09	3.50	2.76	2.26	1.22
1.60V/cell	80.4	53.1	40.4	32.1	23.3	16.9	13.8	10.0	7.97	6.08	4.88	4.15	3.56	2.80	2.29	1.24