

LECXO®

LX28-12(12V28AH)

RECHARGEABLE SEALED LEAD-ACID BATTERY



LX-Series

MADE IN VIETNAM



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING



MEDICAL



FIRE &
SECURITY

APPLICATIONS

- All purpose
- Uninterruptible Power Supply (UPS)
 - Electric Power System (EPS)
- Emergency backup power supply
 - Alarm and security system
- Communication power supply
 - DC power supply
 - Auto control system

GENERAL FEATURES

- 7 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate





STANDARDS

- Compliance with IEC60896 standards, EU Battery Directive
- Manufactured with IATF16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities

SPECIFICATIONS

Rated Voltage		12V
Nominal Capacity	28Ah	(C ₂₀ , 1.75V/cell)
Dimension	Length	164±1mm (6.46 inches)
	Width	125±1mm (4.92 inches)
	Container Height	174±1mm (6.85 inches)
	Total Height	174±1mm (6.85 inches)
Approx Weight		9.10 Kg (20.1 lbs)
Terminal		T12-I/T12
Container Material		ABS
Rated Capacity(25°C)	28.0 Ah	(20hr, 1.4A, 1.75V/cell)
	26.0 Ah	(10hr, 2.6A, 1.75V/cell)
	23.8 Ah	(5hr, 4.76A, 1.75V/cell)
	21.4Ah	(3hr, 7.14A, 1.75V/cell)
	17.6Ah	(1hr, 17.6A, 1.60V/cell)
Max. Discharge Current		420A (5s)
Internal Resistance(25°C)		Approx14mΩ
Operating Temp. Range	Discharge	-15 ~50° C (5 ~122° F)
	Charge	-20 ~40° C (-4 ~104° F)
	Storage	-15 ~40° C (5~ 104° F)
National Operating Temp Range		25±3° C (77±5° F)
Cycle Use		Initial Charging Current less than 8.4A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C
Standby Use		Initial Charging Current less than 8.4A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C
Effect of temp. to Capacity	40° C (104° F)	103%
	25° C (77° F)	100%
	0° C (32° F)	86%
Self Discharge		LX series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.

DIMENSIONS



T12

LECXO®

LX28-12(12V28AH)

RECHARGEABLE SEALED LEAD-ACID BATTERY



LX-Series
MADE IN VIETNAM



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING




MEDICAL




FIRE &
SECURITY


DISCHARGE CHARACTERISTICS

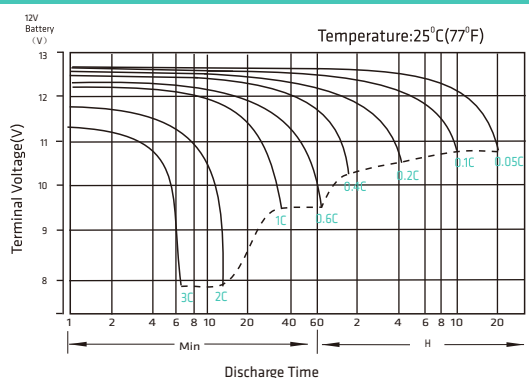


FLOAT CHARGING CHARACTERISTICS

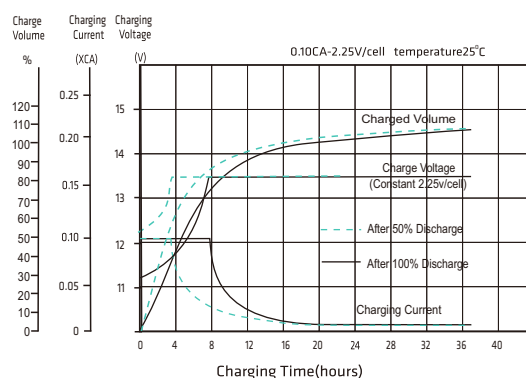

TEMPERATURE EFFECTS IN RELATION TO BATTERY CAPACITY

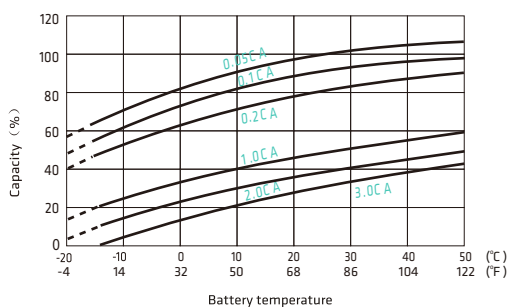

FLOAT SERVICE LIFE

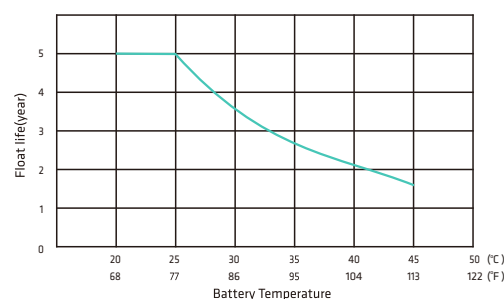

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	75.3	55.0	45.7	38.4	28.4	20.1	15.9	12.0	9.18	6.91	5.62	4.63	4.02	3.13	2.54	1.37
1.80V/cell	80.9	58.3	48.0	39.9	29.3	20.6	16.3	12.2	9.35	7.03	5.70	4.70	4.08	3.18	2.57	1.38
1.75V/cell	85.3	60.7	49.6	41.1	30.0	21.0	16.6	12.5	9.52	7.14	5.78	4.76	4.13	3.21	2.60	1.40
1.70V/cell	89.3	63.1	51.2	42.2	30.8	21.5	17.0	12.7	9.66	7.24	5.86	4.83	4.18	3.24	2.63	1.41
1.67V/cell	92.4	64.9	52.5	43.1	31.4	21.9	17.2	12.8	9.77	7.31	5.92	4.87	4.22	3.27	2.65	1.42
1.60V/cell	98.0	67.6	54.3	44.4	32.2	22.4	17.6	13.1	10.0	7.45	6.02	4.94	4.28	3.31	2.68	1.44

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	142.4	104.7	87.6	74.0	54.9	38.9	31.0	23.4	18.0	13.6	11.1	9.15	7.95	6.21	5.05	2.74
1.80V/cell	151.6	110.2	91.3	76.5	56.4	39.8	31.6	23.8	18.3	13.8	11.2	9.27	8.07	6.29	5.11	2.77
1.75V/cell	158.0	113.8	93.8	78.2	57.6	40.5	32.2	24.2	18.5	14.0	11.4	9.37	8.15	6.35	5.16	2.80
1.70V/cell	163.8	117.5	96.3	80.1	58.8	41.3	32.6	24.5	18.8	14.1	11.5	9.49	8.23	6.41	5.21	2.82
1.67V/cell	168.1	120.2	98.4	81.5	59.7	41.8	33.1	24.8	18.9	14.3	11.6	9.56	8.30	6.46	5.24	2.84
1.60V/cell	174.9	123.7	101.1	83.5	61.0	42.6	33.7	25.2	19.3	14.5	11.8	9.69	8.40	6.54	5.31	2.88