

LECXO®

LX55-12 (12V55AH)

RECHARGEABLE SEALED LEAD-ACID BATTERY



LX-Series

MADE IN VIETNAM



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING



MEDICAL



FIRE &
SECURITY

APPLICATIONS

- All purpose
- Uninterruptible Power Supply (UPS)
 - Electric Power System (EPS)
- Emergency backup power supply
 - Alarm and security system
- Communication power supply
 - DC power supply
 - Auto control system

GENERAL FEATURES

- 7 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
 - PbCaSn alloy for plate grids: less gassing, less self- discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate

STANDARDS



Compliance with & Manufacturing Facilities Certified by:

- ISO 45001, 9001 & 14001
- IEC 60896 Standard
- EU Battery Directive
 - UL Certified
 - CE Certified

SPECIFICATIONS

Rated Voltage		12V
Nominal Capacity	55.0Ah	(C ₂₀ : 1.80 V/cell)
Dimension	Length	229±2mm (9.02inches)
	Width	138±2mm (5.43inches)
	Container Height	205±2mm (8.07 inches)
	Total Height	211±2mm (8.31 inches)
Approx Weight		17.8 Kg (39.2 lbs)
Terminal		M6
Container Material		ABS
Rated Capacity (25°C)	57.8Ah	(20hr, 2.89A, 1.80V/cell)
	55.0Ah	(10hr, 5.50A, 1.80 V/cell)
	50.0Ah	(5hr, 10.0A, 1.75 V/cell)
	45.6Ah	(3hr, 15.2A, 1.75 V/cell)
	35.1Ah	(1hr, 35.1A, 1.60 V/cell)
Max. Discharge Current		550A (5s)
Internal Resistance (25°C)		Approx 9.0mΩ
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	0 ~ 40°C (32 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
National Operating Temp Range		25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 16.5A Voltage 14.4V ~ 15.0V at 25°C (77°F) Temp. Coefficient - 30mV/°C	
Standby Use	Initial Charging Current less than 16.5A Voltage 13.5V ~ 13.8V at 25°C (77°F) Temp Coefficient - 20m V/°C	
Effect of Temp to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge		LX Series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperature the time interval will be shorter

DIMENSIONS



LECXO®

LX55-12 (12V55AH)

RECHARGEABLE SEALED LEAD-ACID BATTERY



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING



MEDICAL




FIRE &
SECURITY




LX-Series
MADE IN VIETNAM




DISCHARGE CHARACTERISTICS

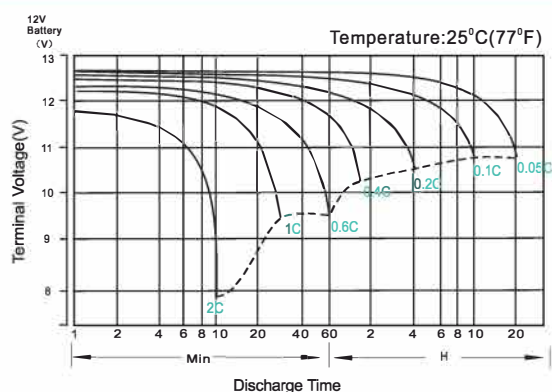


FLOAT CHARGING CHARACTERISTICS

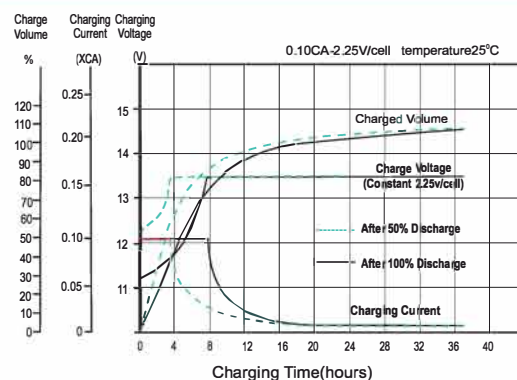

FLOAT SERVICE LIFE

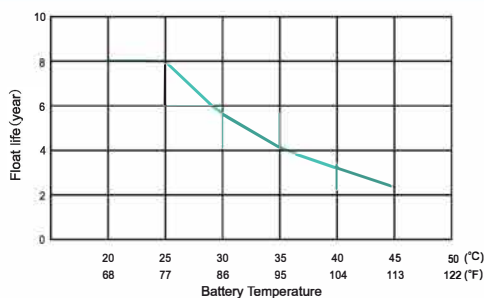

TEMPERATURE EFFECTS IN RELATION TO BATTERY CAPACITY

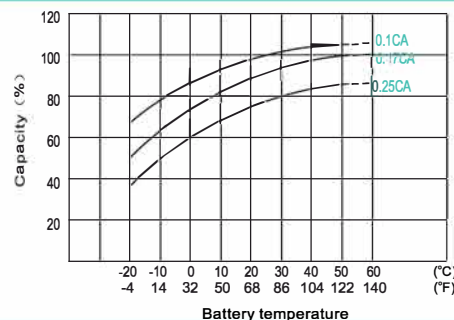

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.v/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	112.1	79.1	70.5	55.5	49.6	36.3	30.7	22.3	18.7	13.7	10.8	9.35	8.24	6.34	5.25	2.79
1.80V/cell	127.5	90.5	79.9	62.7	54.0	38.4	31.8	23.0	19.3	14.9	11.5	9.83	8.86	6.67	5.50	2.89
1.75V/cell	138.5	98.2	86.5	67.7	55.1	39.8	33.4	24.2	20.4	15.2	11.7	10.0	8.93	6.70	0.56	2.92
1.70V/cell	148.1	104.7	91.9	71.8	56.2	40.6	34.1	24.7	20.8	15.5	11.9	10.2	8.97	6.81	5.61	2.95
1.67V/cell	153.3	108.0	94.6	73.8	57.0	41.2	34.6	25.1	21.1	15.6	12.1	10.4	9.01	6.90	5.68	2.98
1.60V/cell	158.7	111.7	97.5	75.7	57.9	41.8	35.1	25.4	21.4	15.8	12.2	10.5	9.08	6.99	5.75	3.02

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	203.0	145.4	133.6	105.5	94.8	69.7	59.4	43.2	36.4	26.8	21.1	18.4	16.3	12.6	10.4	5.55
1.80V/cell	227.1	162.7	149.4	118.0	102.4	73.4	61.2	44.4	37.4	29.0	22.5	19.3	17.4	13.2	10.9	5.74
1.75V/cell	242.4	173.6	159.5	126.0	103.4	75.6	64.0	46.5	39.2	29.5	22.8	19.6	17.5	13.2	11.0	5.79
1.70V/cell	254.8	182.5	167.6	132.4	104.9	76.6	64.9	47.2	39.9	29.9	23.1	19.8	17.6	13.4	11.1	5.84
1.67V/cell	259.0	185.5	170.4	134.6	105.6	77.3	65.5	47.7	40.3	30.1	23.4	20.2	17.6	13.6	11.2	5.91
1.60V/cell	262.6	188.1	172.8	136.5	106.1	77.7	66.0	48.0	40.6	30.2	23.6	20.4	17.7	13.7	11.4	5.97