

LECXO®

LX75-12 (12V-75AH)

RECHARGEABLE SEALED LEAD-ACID BATTERY



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING



MEDICAL



FIRE &
SECURITY



LX-Series
MADE IN VIETNAM

APPLICATIONS

- All purpose
- Uninterruptible Power Supply (UPS)
 - Electric Power System (EPS)
- Emergency backup power supply
 - Alarm and security system
- Communication power supply
 - DC power supply
 - Auto control system

GENERAL FEATURES

- 7 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
 - PbCaSn alloy for plate grids: less gassing, less self- discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate

STANDARDS




Compliance with & Manufacturing Facilities Certified by:

- ISO 45001, 9001 & 14001
- IEC 60896 Standard
- EU Battery Directive
 - UL Certified
 - CE Certified

SPECIFICATIONS

Rated Voltage		12V
Nominal Capacity	75.0Ah	(C ₂₀ , 1.80 V/Cell)
Dimension	Length	260±2mm (10.2inches)
	Width	168±1mm (6.61 inches)
	Container Height	208±2mm (8.19 inches)
	Total Height	214±2mm (8.43 inches)
Approx Weight		22.3kg(49.06 lbs)
Terminal		M6
Container Material		ABS
Rated Capacity (25°C)	78.2Ah	(20hr,3.94A, 1.85V/cell)
	75.0Ah	(10hr,7.50A,1.80 V/cell)
	68.5Ah	(5hr,13.7A,1.75 V/cell)
	62.1Ah	(3hr, 20A, 1.75 V/cell)
	47.8Ah	(1hr,47.8A, 1.60 V/cell)
Max. Discharge Current		750A (5s)
Internal Resistance (25°C)		Approx 6.6m
Operating Temp. Range	Discharge	-15 ~50° C (5 ~122° F)
	Charge	0 ~40° C (32 ~104° F)
	Storage	-15 ~40° C (5 ~ 104° F)
National Operating Temp Range		25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 3.6A Voltage 14.4V ~15.0V at 25°C (77°F) Temp . Coefficient - 30mV/°C	
	Standby Use Initial Charging Current less than 22.5A Voltage 13.5V ~ 13.8V at 25°C (77°F) Temp Coefficient - 20m V/°C	
Effect of Temp to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge		LX Series batteries may be stored for up to 6 months at 25° C (77 °F) and then a freshening charge is required. For higher temperature the time interval will be shorter

DIMENSIONS



LEC XO®

LX75-12 (12V-75AH)

RECHARGEABLE SEALED LEAD-ACID BATTERY



UPS
SYSTEM



GENERAL
PURPOSE



EMERGENCY
LIGHTING



MEDICAL




FIRE &
SECURITY




LX-Series
MADE IN VIETNAM




DISCHARGE CHARACTERISTICS

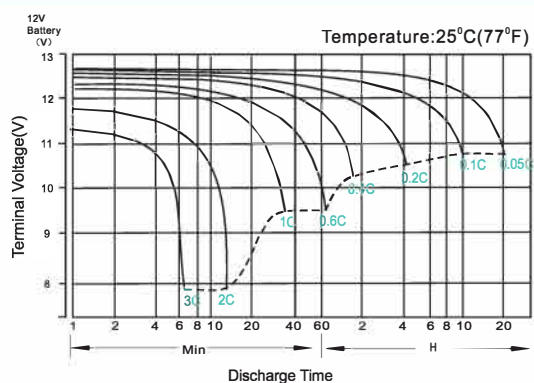


FLOAT CHARGING CHARACTERISTICS

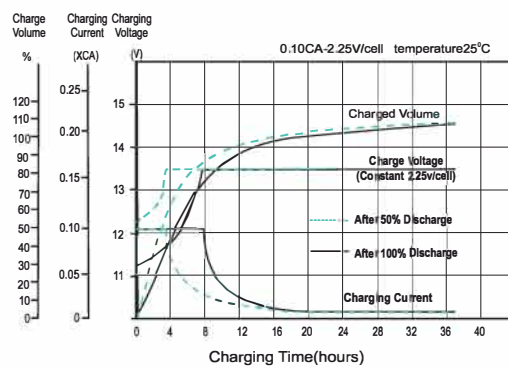

FLOAT SERVICE LIFE

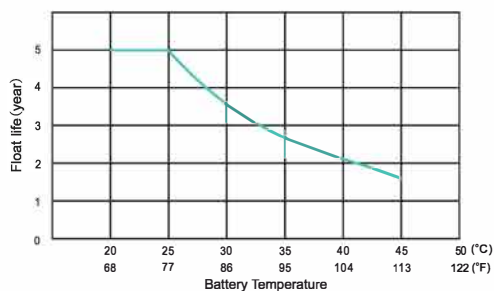

TEMPERATURE EFFECTS IN RELATION TO BATTERY CAPACITY

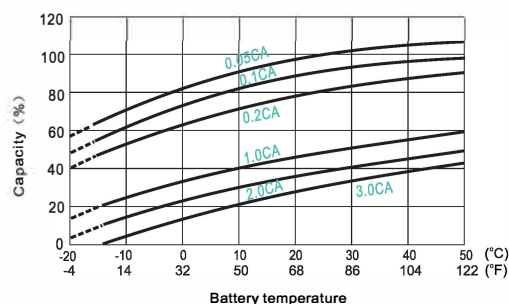

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.v/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	149.8	106.5	96.2	75.7	2.16	49.5	41.9	30.4	25.5	18.7	14.7	12.8	11.2	8.64	7.16	3.80
1.80V/cell	170.4	120.9	109.0	85.5	2.21	52.4	43.4	31.4	26.4	20.3	15.7	13.4	12.1	9.09	7.50	3.94
1.75V/cell	185.1	131.1	118.0	92.3	2.27	54.3	45.5	33.0	27.8	20.7	16.0	13.7	12.2	9.14	7.58	3.98
1.70V/cell	197.8	139.8	125.3	97.9	2.32	55.4	46.5	33.7	28.3	21.1	16.3	13.9	12.2	9.28	7.65	4.02
1.67V/cell	204.7	144.2	129.0	100.6	2.35	56.2	47.1	34.2	28.7	21.3	16.5	14.2	12.3	9.41	7.75	4.07
1.60V/cell	212.0	149.2	133.0	103.2	2.42	57.0	47.8	34.7	29.1	21.5	16.7	14.4	12.4	9.53	7.84	4.11

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	279.8	200.4	182.1	143.9	129.3	93.2	81.0	58.9	49.7	36.6	28.8	25.1	21.8	17.2	14.2	7.57
1.80V/cell	313.0	224.2	203.8	161.0	139.6	98.1	83.5	60.6	51.0	39.5	30.7	26.3	23.3	18.0	14.9	7.83
1.75V/cell	334.0	239.2	217.5	171.8	141.4	101.0	87.2	63.4	53.5	40.2	31.1	26.7	23.4	18.0	15.0	7.90
1.70V/cell	351.1	251.5	228.6	180.6	143.0	102.4	88.5	64.4	54.3	40.8	31.5	27.0	23.5	18.3	15.2	7.97
1.67V/cell	356.9	255.6	232.3	183.5	144.0	103.3	89.3	65.0	54.9	41.0	31.9	27.5	23.5	18.5	15.3	8.06
1.60V/cell	361.9	259.2	235.6	186.1	144.6	103.8	89.9	65.5	55.4	41.2	32.2	27.8	23.6	18.7	15.5	8.14